

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 June 2005 (23.06.2005)

PCT

(10) International Publication Number
WO 2005/057060 A2

(51) International Patent Classification⁷:

F16K

(21) International Application Number:

PCT/JP2004/018684

(22) International Filing Date: 8 December 2004 (08.12.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2003-415686 12 December 2003 (12.12.2003) JP

(71) Applicant (for all designated States except US): TOYOTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi, 4718571 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KUSAKA, Yasushi [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-cho, Toyota-shi, Aichi 4718571 (JP). ASADA, Toshiaki [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-cho, Toyota-shi, Aichi 4718571 (JP). EZAKI, Shuichi [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-cho, Toyota-shi, Aichi 4718571 (JP). TSUJI, Kimitoshi [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-cho, Toyota-shi, Aichi 4718571 (JP).

(74) Agents: YAMAMOTO, Koji et al.; c/o Tokyo Central Patent Firm, 4th Floor, Oak Building Kyobashi, 16-10, Kyobashi 1-chome, Chuo-ku, Tokyo, 1040031 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: VALVE GEAR

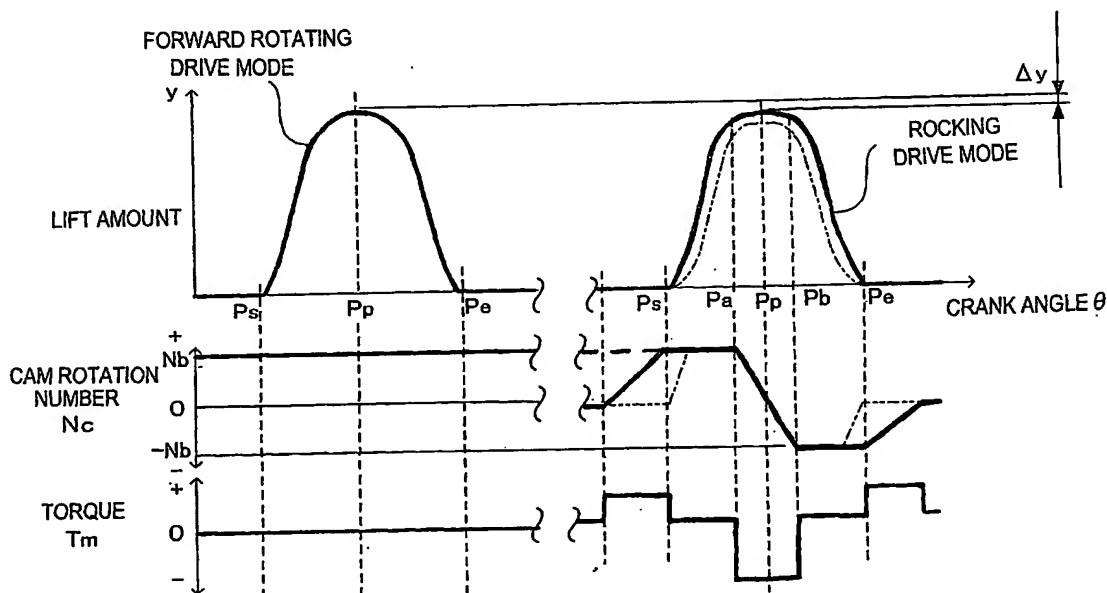

(57) Abstract: There is provided a valve gear (11A, 11B) of an internal combustion engine converting a rotational motion of a motor (12) into a linear motion by a cam (21), and driving an intake valve (2) or an exhaust valve (3) of a cylinder (1) so as to be opened and closed based on the linear motion, a motor control apparatus (30) which can actuate the motor (12) in a rocking drive mode in which a rotating direction of the cam (21) is changed during a lift of the valve (2, 3). The motor control apparatus (30) controls a motion of the motor (12) such that the cam (21) starts rotating before the valve (2, 3) starts lifting in the rocking drive mode.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.